

## ADDENDUM NO. 2

BID TITLE: Milling and Resurfacing of Parking Lots

BID NO: 2024-05

DATE: June 17, 2024

To All Bidders:

Bidders for the above referenced Bid shall take note of the following changes, additions, deletions, clarifications, etc., to the Bid documents, which shall become a part of and have precedence over anything shown or described otherwise.

### A. CHANGES IN THE BID DOCUMENTS

1. Addendum No. 1, Attachment A, Pavers Design, Manufacturer, and Specifications: the first page of the attachment is hereby replaced with enclosed Rev. Attachment A, Pavers Design, Manufacturer, and Specifications.

2. Bid Plans: Sheet 10, Site Plan, of the bid document is hereby replaced with enclosed Rev. Attachment Sheet 10.

### B. CLARIFICATIONS

None.

### C. QUESTIONS FROM BIDDERS

None.


### ATTACHMENTS

- 1.Rev. Attachment A, Pavers Design, Manufacturer, and Specifications.
- 2.Rev. Attachment Sheet 10

### END OF ADDENDUM NO. 2

**All other information remains as originally described in the solicitation.**



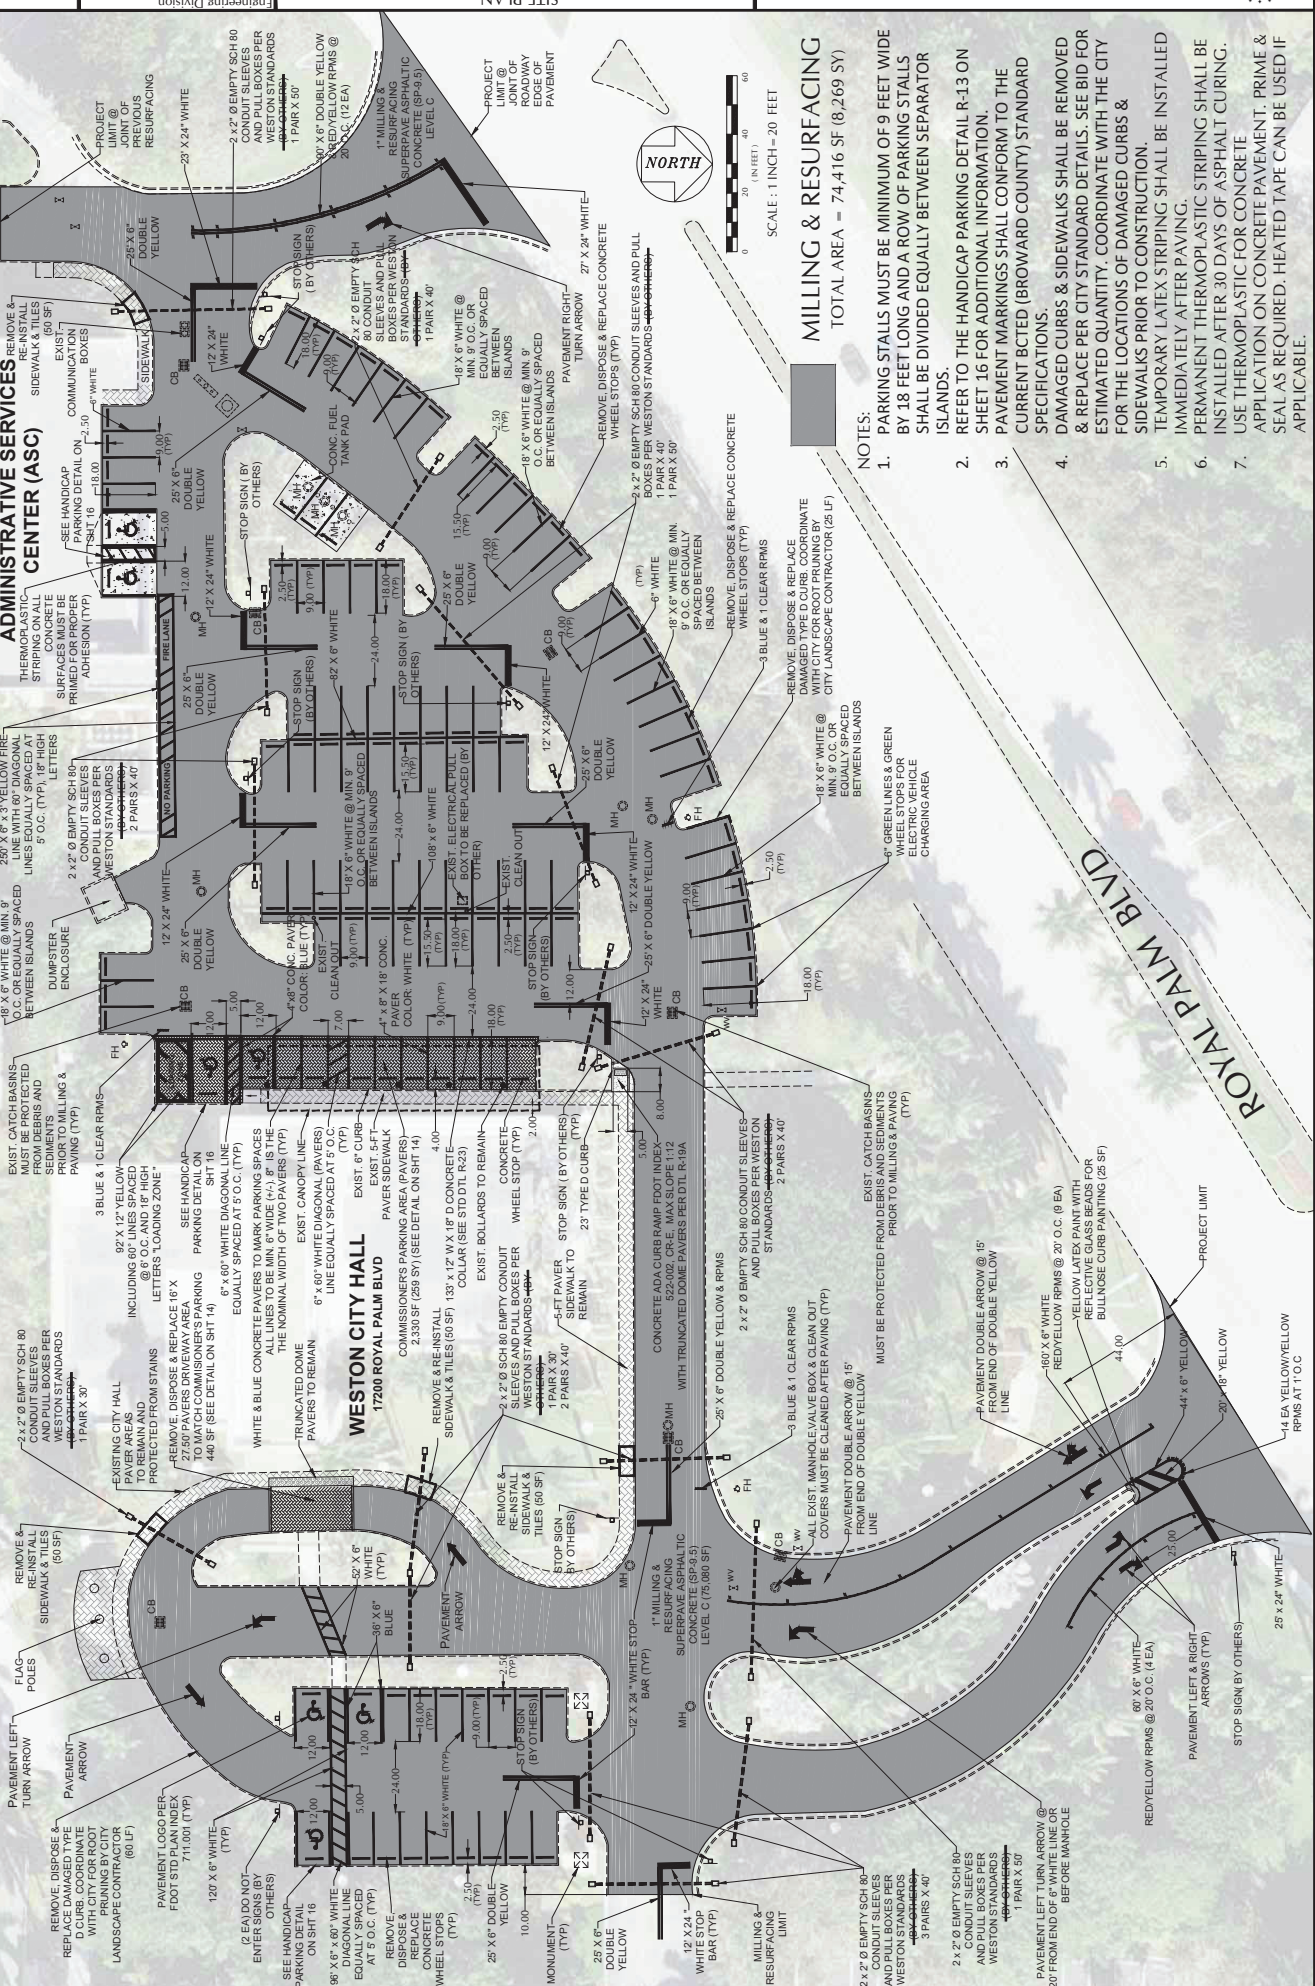

### MILLING & RESURFACING

TOTAL AREA = 74,416 SF (8,269 SY)

#### NOTES:

1. PARKING STALLS MUST BE MINIMUM OF 9 FEET WIDE BY 18 FEET LONG AND A ROW OF PARKING STALLS SHALL BE DIVIDED EQUALLY BETWEEN SEPARATOR ISLANDS.
2. REFER TO THE HANDICAP PARKING DETAIL R-13 ON SHEET 16 FOR ADDITIONAL INFORMATION.
3. PAVEMENT MARKINGS SHALL CONFORM TO THE CURRENT BCTD (BROWARD COUNTY) STANDARD SPECIFICATIONS.
4. DAMAGED CURBS & SIDEWALKS SHALL BE REMOVED & REPLACE PER CITY STANDARD DETAILS. SEE BID FOR ESTIMATED QUANTITY. COORDINATE WITH THE CITY FOR THE LOCATIONS OF DAMAGED CURBS & SIDEWALKS PRIOR TO CONSTRUCTION.
5. TEMPORARY LATEX STRIPING SHALL BE INSTALLED IMMEDIATELY AFTER PAVING.
6. PERMANENT THERMOPLASTIC STRIPING SHALL BE INSTALLED AFTER 30 DAYS OF ASPHALT CURING.
7. USE THERMOPLASTIC FOR CONCRETE APPLICATION ON CONCRETE PAVEMENT. PRIME & SEAL AS REQUIRED. HEATED TAPE CAN BE USED IF APPLICABLE.



### ADMINISTRATIVE SERVICES CENTER (ASC)

RE-INSTALL SIDEWALK & TILES  
RE-INSTALL COMMUNICATION BOXES  
RE-INSTALL EXISTING SIDEWALKS  
PRIME & SEAL PREVIOUS PAVEMENT  
RE-INSTALL COMMUNICATION BOXES  
RE-INSTALL EXISTING SIDEWALKS  
PRIME & SEAL PREVIOUS PAVEMENT

### WESTON CITY HALL 17200 ROYAL PALM BLVD

REMOVE & RE-INSTALL SIDEWALK & TILES (50 SF)  
REMOVE & RE-INSTALL SIDEWALK & TILES (50 SF)  
REMOVE & RE-INSTALL SIDEWALK & TILES (50 SF)

ROYAL PALM BLVD